



Communication Solutions



Take your safety personally

3M, the world's leader in safety and protective equipment, is proud to have the Peltor™ brand range as part of its product offering.

Peltor™ Communication Equipment as well as hearing, head & face protection products for noisy and hazardous environments are renowned world leaders. With more than 50 years of experience, the Peltor™ Brand promises superior quality communication solutions that provide an optimal balance of comfort and protection.

It is our goal is to ensure that we satisfy your needs through the provision of exceptional leadership, expertise, quality and service excellence. With our global technology, manufacturing and knowledge network we do more than simply develop products that help your workforce to operate in safety and comfort. The advanced engineering and technology inherent with the Peltor™ Brand fits with the high standard of quality and innovation of a continuously evolving range of product solutions that you, our customers, come to expect from 3M.



Protection all the way

Our mission is to help protect people at work, at home, for life. We believe that health and safety is the priority in any working environment and that greater comfort improves worker protection, resulting in enhanced productivity and safety compliance.

Long lasting innovations

To deliver on our commitment requires a culture of accountability, customer inspired innovation, knowledge and expertise, fuelled by a deep understanding of our customer needs. The Peltor™ Brand, trusted as a leader in hearing, eye and head & face protection, offers a comprehensive portfolio of hearing protectors paired with communication systems.

Working together

3M is more than just products. We work closely with distributors, safety professionals and companies to protect employees exposed to hazardous environments. With offices around the world, 3M can help our customers succeed everywhere.

Partnership in safety

Many renowned companies have chosen Peltor™ Products for optimum safety at work. With customised printing, embossing and other solutions, our products can also help enhance the value of your brand.

Contents



HEADSETS		WORKSTYLE	
Peltor™ Non Attenuation Headset	7	Peltor™ FM Radio Hearing Protector	47
Peltor™ Medium Attenuation Headset	8	Peltor™ Radio Hearing Protector	48
Peltor™ High Attenuation Standard Headset	9	Peltor™ Alert FM Radio Hearing Protector	49
Peltor™ High Attenuation Direct Lead Headset	10	📶 Peltor™ Alert FM Radio Hearing Protector WS Bluetooth™	50
📶 Peltor™ High Attenuation WS Bluetooth™ Headset	11		
📶 Peltor™ High Attenuation WS Bluetooth™ ATEX Headset	12	MOTORSPORT	
📶 Peltor™ High Attenuation ATEX Headset	13	Peltor™ Rally Intercom	53
Peltor™ High Attenuation Standard TwinCup Headset	14	Peltor™ Motorcycle Intercom	54
📶 Peltor™ High Attenuation TwinCup ATEX Headset	15	Peltor™ Rally Headset	55
📶 Peltor™ High Attenuation WS Bluetooth™ Ground Mechanics Headset	16	Peltor™ Helmet Headset Kits	56
Peltor™ High Attenuation Ground Mechanics Headset	17	Peltor™ Racing Communication Plugs	57
		Peltor™ G7 RC Helmet	58
		Peltor™ Performance G78 Helmet	59
		Peltor™ G10 Helmet	60
AVIATION			
Peltor™ High Attenuation Headset, Fixed wing	19	INTERCOM SYSTEMS	
Peltor™ High Attenuation Headset, Helicopter	20	Peltor™ Dect-Com™ Intercom System	63
Peltor™ High Attenuation TwinCup Headset, Helicopter	21	Peltor™ Vehicle Intercom	63
LISTEN ONLY			
Peltor™ Medium Attenuation Headset	23	ADAPTERS AND CABLES	
Peltor™ High Attenuation Headset	24	Flex Cables	65
📶 Peltor™ High Attenuation ATEX Headset	26	Standard Adapters	65
		📶 ATEX Adapters	65
		📶 WS Adapters	66
		Ground Mechanics Adapters	66
		Peltor™ LiteCom™ Cables	66
LIGHTWEIGHT SOLUTIONS			
Peltor™ HearPlug	29	ACCESSORIES	
Peltor™ LW Headset	30	Hygiene Kits	67
		Wind Protection	67
		Headset Hanger, Cases, Bags	68
		Throat Microphones	69
		Finger PTT's	69
		External PTT's	69
		Battery Pack and Charger	69
LITE-COM			
Peltor™ Lite-Com™ Basic Communication Headset	33		
Peltor™ Lite-Com™ III Communication Headset	34		
📶 Peltor™ Lite-Com™ Pro Communication Headset	35		
TACTICAL			
Peltor™ SportTac™ Level Dependent Hearing Protector	37		
Peltor™ ProTac™ II Level Dependent Hearing Protector	38		
Peltor™ ComTac™ Level Dependent Hearing Protector	39		
Peltor™ ComTac™ XS Level Dependent Hearing Protector	40		
Peltor™ ComTac™ XP Level Dependent Hearing Protector	41		
Peltor™ Tactical™ XP Level Dependent Hearing Protector	42		
📶 Peltor™ Tactical™ XP ATEX Level Dependent Hearing Protector	43		
📶 Peltor™ Tactical™ XP WS Bluetooth™ Level Dependent Hearing Protector	44		
Peltor™ Tactical™ XP Ground Mechanics Level Dependent Hearing Protector	45		



Communication Solutions

Functions

Short description of functions and the meaning of symbols.



Atex-approved

The range of ATEX approved products are developed for users who spend time in highly explosive environments, such as the off shore - and refining industry.



Built in communication radio

Hearing protectors with built in communication radio.



Level Dependent Function

Each cup has a microphone that captures all sounds. The electronics inside analyse the information and process the sound before reproducing it to the ear. It provides effective protection against impulse noises like gunshots. At the same time, speech and weak signals can be amplified up to 10 times in comparison to conventional hearing protection.



Two way communication

To communicate at a distance via communication radio, mobile or DECT-phone.



Bluetooth™

Hearing protectors with built in Bluetooth™.




Built in FM/AM Radio Receiver

Hearing protectors with built in FM/AM-radio receiver.



Listen only function

To be able to listen to radio traffic, for example via a communication radio, mobile or DECT -phone.

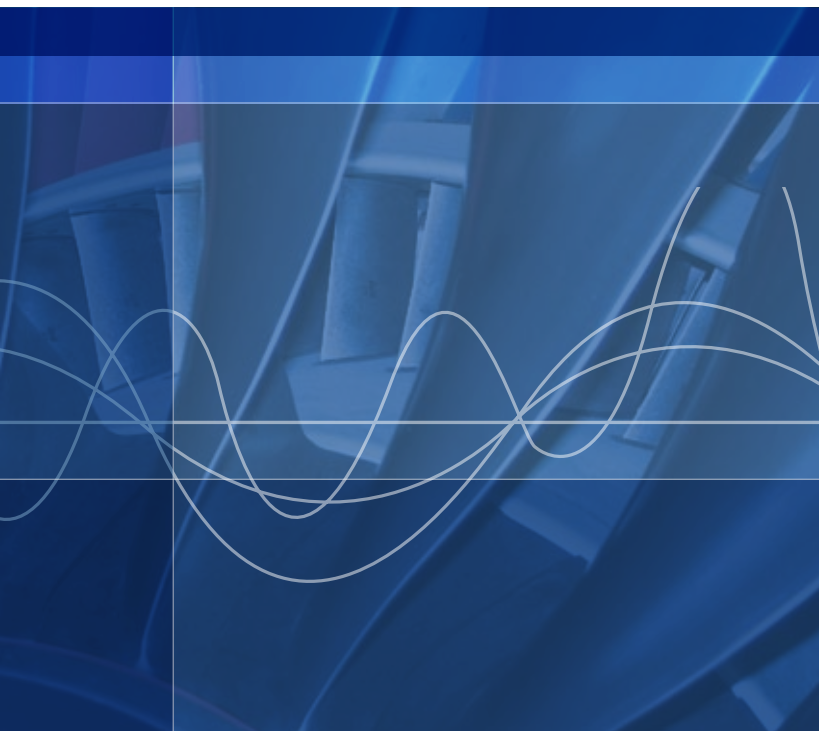

Attenuation ratings

Short description of attenuation ratings and the meaning of symbols. (* RNR = Recommended Noise Rating)



RNR* < 85dB(A)

You do not have to wear hearing protection, but it's available to your workers.



RNR* 83-85dB(A)

You are above the permitted exposure level, hearing protection is compulsory.



RNR* 87-98dB(A)

You are above the permitted exposure level, hearing protection is compulsory. Ideal for high frequency noise.



RNR* 94-105dB(A)

You are above the permitted exposure level, hearing protection is compulsory. Ideal for high and medium frequency noise.




RNR* 95-110dB(A)

You are above the permitted exposure level, hearing protection is compulsory. Ideal for high and medium frequency noise.

Warning:

At levels above 95dB(A) you will need accurate noise assessment to select product correctly. Green and Yellow marked products are not for use in low frequency noise.

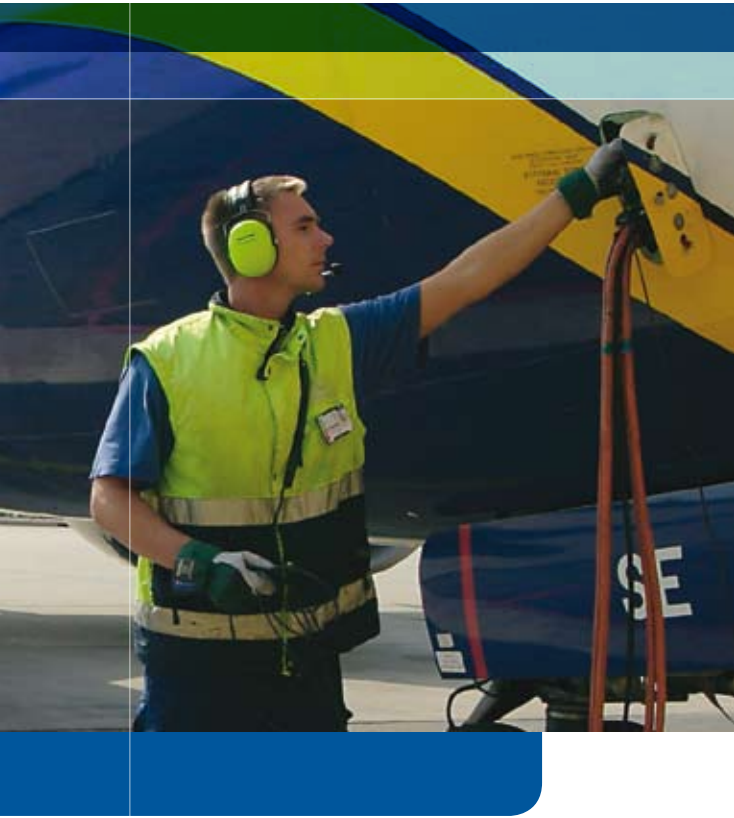

Headset Solutions

With its carefully designed microphone/speaker system and excellent attenuation, the range offers unique acoustic performance providing outstanding communication in very high-noise environments.



Peltor™ Non Attenuation Headset

MT32H01, MT32H02





MT32H01



MT32H02

- Very high comfort due to a broad headband of sprung stainless steel, which ensures even head contact pressure
- Replaceable padding
- Built-in air ducts
- Continuous height adjustment
- Load-relieving cord clip
- Standard version with J11 connector
- Available in single sided or dual earphones
- Not CE approved as hearing protection device

Description	Product code	Attachment	Colour
Single sided, J11	MT32H01	Headband	 
Dual earphone, J11	MT32H02	Headband	 









Peltor™ Medium Attenuation Headset

MT7H61A, MT7H61B



MT7H61FA

- Low-profile shells for easy, comfortable use together with other PPE devices
- Low weight
- Dynamic speech microphone with effective noise compensation for clear and reliable communication
- Quick positioning microphone for easy handling
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for the best possible comfort
- Beam-mounted earphones that provide the least possible resonance and distortion for excellent sound reproduction even in high-noise environments
- Available in standard version with J11 (Nexus TP-120) connector. Also available in a direct-connected version on request.
- Choose between head or neckband

Description	Product code	Attachment	Weight (g)	Colour
J11 connector	MT7H61A	Headband	280	 
J11 connector	MT7H61B	Neckband	280	 
J11 connector	MT7H61FA	Foldable headband	280	 

MT7H61A

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	11.2	14.3	25.6	29	32	38.7	35.8
Standard Deviation (dB)	4.7	2.2	2.0	2.0	3.4	2.9	4.2
Assumed Protection (dB)	6.5	12.1	23.6	27	28.6	36.8	34.5

SNR=26dB H=31dB M= 23dB L=14dB

MT7H61B

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	11.2	14.3	25.6	29	32	38.7	35.8
Standard Deviation (dB)	4.7	2.2	2.0	2.0	3.4	2.9	4.2
Assumed Protection (dB)	6.5	12.1	23.6	27	28.6	36.8	34.5

SNR=25dB H=31dB M= 23dB L=14dB

MT7H61FA

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	11.2	14.3	25.6	29	32	38.7	35.8
Standard Deviation (dB)	4.7	2.2	2.0	2.0	3.4	2.9	4.2
Assumed Protection (dB)	6.5	12.1	23.6	27	28.6	36.8	34.5

SNR=25dB H=31dB M= 23dB L=14dB



Peltor™ High Attenuation, Standard Headset

MT7H79A, MT7H79B, MT7H79P3E



- High-attenuating shells with optimised acoustic design and excellent space for the ears for the best possible sound quality and comfort
- Microphone with effective noise compensation for clear and reliable communication
- Quick positioning integrated microphone boom for easy handling
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for the best possible comfort
- Standard J11 connection (Nexus TP-120)
- Beam-mounted earphones that provide the least possible resonance and distortion for excellent sound reproduction even in very high-noise environments
- Numerous configurations. Overhead, neckband and helmet-attached versions to meet most users' requirements

MT7H79A

Description

J11, dynamic mic, 230 ohm
 J11, dynamic mic, 230 ohm
 J11, dynamic mic, 230 ohm

Product code

MT7H79A
 MT7H79B
 MT7H79P3E

Attachment

Headband
 Neckband
 Helmet attachment

Weight (g)

315
 300
 345

Colour



MT7H79A

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.7	27.1	33.8	38.1	36.2	33.6	37.1
Standard Deviation (dB)	2.9	2.1	2.4	2.6	2.3	2.5	2.2
Assumed Protection (dB)	14.8	25	31.4	35.5	33.9	31.1	34.9

SNR=33dB H=33dB M=32dB L=24dB

MT7H79B

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.7	27.1	33.8	38.1	36.2	33.6	37.1
Standard Deviation (dB)	2.9	2.1	2.4	2.6	2.3	2.5	2.2
Assumed Protection (dB)	14.8	25	31.4	35.5	33.9	31.1	34.9

SNR=33dB H=33dB M=32dB L=24dB

MT7H79P3E

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.2	26.4	33.9	37.2	35.4	33.2	37
Standard Deviation (dB)	3.1	2.5	2.7	2.3	2.6	2.4	2
Assumed Protection (dB)	14.1	23.9	31.2	34.9	32.8	30.8	35

SNR=32dB H=33dB M=31dB L=23dB



Peltor™ High Attenuation Headset

WS, Bluetooth™



MT53H7AWS2

- Wireless connection to phones or communication radios using Bluetooth™ technology
- The headset and telephone can be up to 10 metres apart and out of visible range without losing contact
- Volume and answer button on the shell
- High-attenuating shells with optimised acoustic design and excellent space for the ears for the best possible sound quality and comfort
- Microphone with effective noise compensation for clear and reliable communication
- Quick positioning integrated microphone boom for easy handling
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for the best possible comfort
- Beam-mounted earphones that provide the least possible resonance and distortion for excellent sound reproduction even in very high-noise environments

Description

WS Headset - Bluetooth™
 WS Headset - Bluetooth™
 WS Headset - Bluetooth™

Product code

MT53H7AWS2
 MT53H7P3EWS2
 MT53H7BWS2

Attachment

Headband
 Helmet attachment
 Neckband

Weight (g)

370
 420
 355

Colour



MT53H7AWS2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12	20.6	29.6	35.1	30.4	32.4	36.7

SNR=31dB H=32dB M=29dB L=20dB

MT53H7BWS2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12	20.6	29.6	35.1	30.4	32.4	36.7

SNR=31dB H=32dB M=29dB L=20dB

MT53H7P3EWS2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	14	22.4	28.1	33.8	33.4	35.4	38.7
Standard Deviation (dB)	1.5	2.7	1.7	2.3	2.6	2.3	1.8
Assumed Protection (dB)	12.5	19.7	26.4	31.5	30.8	33.1	36.9

SNR=30dB H=33dB M=28dB L=20dB



Peltor™ High Attenuation Headset WS, Bluetooth™, ATEX



MT53H7FWS2-50

- EEx-approved headsets according to ATEX class:
 - II 2G Ex ia IIC T4
 - II 2D Ex iaD T130°
 - I M1 Ex ia I
- Wireless connection to phones or communication radios using Bluetooth™ technology
- The headset and telephone can be up to 10 metres apart and out of visible range without losing contact
- Volume and answer button on the shell
- High-attenuating shells with optimised acoustic design and excellent space for the ears for the best possible sound quality and comfort
- Microphone with effective noise compensation for clear and reliable communication
- Quick positioning integrated microphone boom for easy handling
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for the best possible comfort
- Beam-mounted earphones that provide the least possible resonance and distortion for excellent sound reproduction even in very high-noise environments
- Ex-approved battery pack included

Description

WS Headset - Bluetooth™
WS Headset - Bluetooth™

Product code

MT53H7FWS2-50
MT53H7P3EWS2-50

Attachment

Foldable Headband
Helmet attachment

Weight (g)

370
420

Colour



MT53H7FWS2-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12	20.6	29.6	35.1	30.4	32.4	36.7

SNR=31dB H=32dB M=29dB L=20dB

MT53H7P3WS2-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	14	22.4	28.1	33.8	33.4	35.4	38.7
Standard Deviation (dB)	1.5	2.7	1.7	2.3	2.6	2.3	1.8
Assumed Protection (dB)	12.5	19.7	26.4	31.5	30.8	33.1	36.9

SNR=30dB H=33dB M=28dB L=20dB



Peltor™ High Attenuation Headset

ATEX



MT7H79F-50

- EEx-approved headsets according to ATEX class EEx ib IIC T4
- High-attenuating shells with optimised acoustic design and excellent space for the ears for the best possible sound quality and comfort
- Microphone with effective noise compensation for clear and reliable communication
- Integrated microphone boom with quick positioning for easy handling
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for the best possible comfort Standard J11 connection (Nexus TP-120)
- Beam-mounted earphones that provide the least possible resonance and distortion for excellent sound reproduction even in very high-noise environments
- Numerous configurations. Overhead, neckband and helmet-attached versions to meet most users' requirements

ATEX Adapters, see page 66

Description

ATEX, 230 ohm, J11, dyn. Mic.
ATEX, 230 ohm, J11, dyn. Mic.
ATEX, 230 ohm, J11, dyn. Mic.

Product code

MT7H79F-50
MT7H79B-50
MT7H79P3E-50

Attachment

Foldable Headband
Neckband
Helmet attachment

Weight (g)

335
300
345

Colour



MT7H79F-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.7	27.1	33.8	38.1	36.2	33.6	37.1
Standard Deviation (dB)	2.9	2.1	2.4	2.6	2.3	2.5	2.2
Assumed Protection (dB)	14.8	25	31.4	35.5	33.9	31.1	34.9

SNR=33dB H=33dB M=32dB L=24dB

MT7H79P3E-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.2	26.4	33.9	37.2	35.4	33.2	37.2
Standard Deviation (dB)	3.1	2.5	2.7	2.3	2.6	2.4	2
Assumed Protection (dB)	14.1	23.9	31.2	34.9	32.8	30.8	35

SNR=32dB H=33dB M=31dB L=23dB

MT7H79B-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.7	27.1	33.8	38.1	36.2	33.6	37.1
Standard Deviation (dB)	2.9	2.1	2.4	2.6	2.3	2.5	2.2
Assumed Protection (dB)	14.8	25	31.4	35.5	33.9	31.1	34.9

SNR=33dB H=33dB M=32dB L=24dB



Peltor™ High Attenuation Headset Standard Twin Cup Headset



MT7H540F GB

- Extra high-attenuating twin shells with optimised acoustic design and excellent space for the ears for the best possible sound quality and comfort
- Microphone with effective noise compensation for clear and reliable communication
- Quick positioning integrated microphone boom for easy handling
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for the best possible comfort
- Overhead and helmet-attached versions to meet most users' requirements

Description

J11, dynamic mic, 230 ohm
J11, dynamic mic, 230 ohm

Product code

MT7H540F GB
MT7H540P3E GB

Attachment

Headband
Helmet attachment

Weight (g)

440
440

Colour



MT7H540F GB

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	18.9	24.4	32.7	35.3	33.3	41.0	39.4
Standard Deviation (dB)	2.3	1.8	1.7	2.6	2.7	3.0	3.2
Assumed Protection (dB)	16.6	22.6	31.0	32.7	30.6	38.1	36.2

SNR=33dB H=33dB M=31dB L=24dB

MT7H540P3E GB

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.9	27.3	34.0	35.8	31.5	40.5	36.5
Standard Deviation (dB)	3.3	3.6	4.2	2.9	3.0	4.7	4.0
Assumed Protection (dB)	14.6	19.7	29.0	32.9	28.5	35.8	32.5

SNR=31dB H=31dB M=29dB L=24dB



Peltor™ High Attenuation Headset

Twin Cup Headset, ATEX



MT53H7AWS2

- High-attenuating shells with optimised acoustic design and excellent space for the ears for the best possible sound quality and comfort
- Microphone with effective noise compensation for clear and reliable communication
- Quick positioning integrated microphone boom for easy handling
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for the best possible comfort
- Numerous configurations. Overhead, neckband and helmet-attached versions to meet most users' requirements
- II 2 G Ex ib IIC T4

ATEX Adapters, see page 66

Description	Product code	Attachment	Weight (g)	Colour
TwinCup Headset	MT72H540F-50	Foldable Headband	440	
TwinCup Headset	MT72H540P3E-50	Helmet attachment	440	

MT72H540F-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	18.9	24.4	32.7	35.3	33.3	41.0	39.4
Standard Deviation (dB)	2.3	1.8	1.7	2.6	2.7	3.0	3.2
Assumed Protection (dB)	16.6	22.6	31.0	32.7	30.6	38.1	36.2

SNR=33dB H=33dB M=31dB L=24dB

MT72H540P3E-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.9	27.3	34.0	35.8	31.5	40.5	36.5
Standard Deviation (dB)	3.3	3.6	4.2	2.9	3.0	4.7	4.0
Assumed Protection (dB)	14.6	19.7	29.0	32.9	28.5	35.8	32.5

SNR=31dB H=31dB M=29dB L=24dB



Peltor™ High Attenuation Headset

Ground Mechanics WS, Bluetooth™



- Wireless connection to WS Ground Mechanic adapter using Bluetooth™ technology
- The headset and adapter can be up to 10 metres apart and out of visible range without losing contact
- Volume and PTT button on the shell
- High-attenuating shells with optimised acoustic design and excellent space for the ears for the best possible sound quality and comfort
- Microphone with effective noise compensation for clear and reliable communication
- Quick positioning integrated microphone boom for easy handling
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless sprung steel provide an even and consistent distribution of pressure around the ears for the best possible comfort
- Beam-mounted earphones that provide the least possible resonance and distortion for excellent sound reproduction even in very high-noise environments
- Socket for External PTT

MT53H7AWS2-01 GB

Description

WS Headset - Bluetooth™

Product code

MT53H7AWS2-01 GB

Attachment

Headband

Weight (g)

370

Colour



MT53H7AWS2-01 GB

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12	20.6	29.6	35.1	30.4	32.4	36.7

SNR=31dB H=32dB M=29dB L=20dB

Peltor™ WS Ground Mechanics Adapter

Ground Mechanics WS, Bluetooth™



Description

Ground mechanic, WS adapter
External PTT

Product code

FL6007-WS
FL5602

Weight (g)

200
150



Peltor™ High Attenuation Headset

Ground Mechanics



MT7H79F-01 GB

- Special headset for communication between ground and aircraft cockpit
- High attenuating cups with optimised acoustic design and excellent space for the ears for best possible sound quality and comfort
- Dynamic differential microphone with excellent ambient noise compensation and a built-in microphone amplifier
- Quick positioning integrated microphone boom for easy handling
- Soft, wide foam and fluid filled sealing rings and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for best possible comfort
- Standard J11 connection (Nexus TP-120)
- Beam-mounted earphones that provide the least possible resonance and distortion for excellent sound reproduction even in very high noise environments
- Available with high attenuating double shell cups, twin cup, with optimised acoustic design and excellent space for the ears for best possible sound quality and comfort

Ground Mechanic Adapters, see page 66



MT53H540F-01 GB

MT7H79F-01 GB

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.7	27.1	33.8	38.1	36.2	33.6	37.1
Standard Deviation (dB)	2.9	2.1	2.4	2.6	2.3	2.5	2.2
Assumed Protection (dB)	14.8	25	31.4	35.5	33.9	31.1	34.9

SNR=33dB H=33dB M=32dB L=24dB

MT53H540F-01 GB

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	18.9	24.4	32.7	35.3	33.3	41	39.4
Standard Deviation (dB)	2.3	1.8	1.7	2.6	2.7	3	3.2
Assumed Protection (dB)	16.6	22.6	31	32.7	30.6	38.1	36.2

SNR=33dB H=33dB M=31dB L=24dB

Description

Ground mechanic, dyn. mic
 Ground mechanic, electret. mic
 Ground mechanic, dyn. mic

Product code

MT7H79F-01 GB
 MT53H540F-01 GB
 MT7H79F-01

Attachment

Foldable Headband
 Foldable Headband
 Foldable Headband

Weight (g)

330
 400
 330

Colour





Aviation Solutions

When the ground is 32,000 feet below you, you can't afford to have anything go wrong. Perfect communication, convenient design, low weight and maximum comfort are essential requirements of a headset in a noisy aviation environment, in the air and on the ground.



Peltor™ High Attenuation Headset Aviation 8003, 8006



MT52H79F-04 VI

- The Aviation 8003 Headset for winged aircraft has an ambient-noise compensated dynamic differential microphone, specially designed for aviation intercom systems
- The microphone amplifier can be adjusted for output signals in the range of 300-600 mV
- The frequency range is adjusted for good speech recognition
- The straight polyurethane cable with moulded connectors has a stereo/mono switch in the branching box
- The earphones have a 1/4" stereo connector and the microphone has a PJ068 connector.
- The Aviation 8006 Headset for winged aircraft has an ambient-noise compensated electret differential microphone, specially designed for aviation intercom systems
- The microphone amplifier can be adjusted for output signals in the range of 300-600 mV
- The frequency range is adjusted for good speech recognition
- The earphones have a broad frequency range for good sound reproduction
- The straight polyurethane cable with moulded connectors has a stereo/mono switch in the branching box
- The earphones have a 1/4" stereo connector and the microphone has a PJ068 connector

Description

Aviation 8003, CE dynamic mic.

Aviation 8006, CE electret mic.

Product code

MT52H79F-04 VI

MT51H79F-01 VI

Attachment

Headband

Headband

Weight (g)

370

360

Colour



MT52H79F-**

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	15.4	26.6	29.3	40	34.3	33	36.5
Standard Deviation (dB)	3.1	2.2	1.6	1.5	2.4	2.3	1.9
Assumed Protection (dB)	12.3	24.4	27.7	38.5	31.9	30.7	34.6

SNR=31dB H=33dB M=30dB L=21dB



Peltor™ High Attenuation Headset

Aviation 8103, 8106



MT51H79F-02

- The Aviation 8103 Helicopter Headset has an ambient-noise compensated dynamic differential microphone, specially designed for aviation intercom systems
- The microphone amplifier is designed for intercom systems with 5 ohm impedance
- The frequency range is adjusted for good speech recognition
- The earphones have a limited frequency range, to give the best possible speech recognition in the ambient noise of a helicopter
- The spiral polyurethane cable has a moulded NATO-standard connector equivalent to the Nexus TP-120
- The Aviation 8106 Helicopter Headset has an ambient-noise compensated electret differential microphone
- Peltor™ two-point suspension of the shells on a broad headband ensures total comfort and consistent noise attenuation
- The spiral polyurethane cable has a moulded NATO-standard connector equivalent to the Nexus TP-120

Description

Aviation 8103, CE low impedance
Aviation 8106, CE std impedance

Product code

MT52H79F-03
MT51H79F-02

Attachment

Headband
Headband

Weight (g)

360
370

Colour



MT52H79F-**

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	15.4	26.6	29.3	40	34.3	33	36.5
Standard Deviation (dB)	3.1	2.2	1.6	1.5	2.4	2.3	1.9
Assumed Protection (dB)	12.3	24.4	27.7	38.5	31.9	30.7	34.6

SNR=31dB H=33dB M=30dB L=21dB



Peltor™ High Attenuation Headset

Twin Cup Helicopter Headset Hummingbird



- Twin Cup Hummingbird Headset is designed for connection to low impedance helicopter intercom systems
- Leather covered headband and individually sprung headband wires of stainless steel to provide best comfort and durability
- Cable is coiled polyurethane with "European NATO" connected moulded plug.
- Highly attenuating headset for use in extremely noisy environments
- Microphone with efficient noise compensation for clear and reliable communication
- All cables exit at the top of the cups to prevent snagging and allow for easy connection to an overhead intercom
- The coiled cable has extra length to enable it to be connected to a console mounted intercom

Description

Twin Cup Helicopter Headset

Product code

MT72H540F-91

Attachment

Headband

Weight (g)

440

Colour



MT72H540F-91

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	18.9	24.4	32.7	35.3	33.3	41	39.4
Standard Deviation (dB)	2.3	1.8	1.7	2.6	2.7	3	3.2
Assumed Protection (dB)	16.6	22.6	31	32.7	30.6	38.1	36.2

SNR=33dB H=33dB M=31dB L=24dB



Listen Only Solutions

For connection to one-way communication radios, pocket receivers and CD players. The proven and durable designs ensure high comfort levels, allowing long-term use under very tough conditions.



Peltor™ Medium Attenuation Headset

HT61A-01, HT61B-01



HT61B-01

- Low-profile shells for easy and comfortable use together with other PPE devices
- Low weight
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for the best possible comfort
- Beam-mounted earphones that provide the least possible resonance and distortion for excellent sound reproduction even in high-noise environments
- Available with neck or headband
- 3.5 mm stereo connector

Description

3.5mm stereo connector
3.5mm stereo connector

Product code

HT61A-01
HT61B-01

Attachment

Headband
Neckband

Weight (g)

195
195

Colour



HT61A-01

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	11.2	14.3	25.6	29	32	39.7	38.7
Standard Deviation (dB)	4.7	2.2	2	2	3.4	2.9	4.2
Assumed Protection (dB)	6.5	12.1	23.6	27	28.6	36.8	34.5

SNR=25dB H=31dB M=23dB L=14dB

HT61B-01

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	11.2	14.3	25.6	29	32	39.7	38.7
Standard Deviation (dB)	4.7	2.2	2	2	3.4	2.9	4.2
Assumed Protection (dB)	6.5	12.1	23.6	27	28.6	36.8	34.5

SNR=25dB H=31dB M=23dB L=14dB



Peltor™ High Attenuation Headset Listen Only



HTB79A

- Available in mono, or in stereo with a volume level limiter equivalent to 82 dB(A) sound level
- High-attenuating shells with optimised acoustic design and excellent space for the ears for the best possible sound quality and comfort
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for the best possible comfort
- Beam-mounted earphones that provide the least possible resonance and distortion for excellent sound reproduction even in very high-noise environments
- Numerous configurations. Overhead, neckband and helmet-attached versions to meet most users' requirements. Also available with a number of different connectors

Description

1/4" stereo connector, 230 ohm
 1/4" stereo connector, 230 ohm
 1/4" stereo connector, 230 ohm
 3.5mm stereo connector, 230 ohm
 3.5mm mono connector, 230 ohm
 3.5mm mono connector, 230 ohm
 3.5mm mono connector, 230 ohm
 2.5mm mono connector, 230 ohm
 2.5mm mono connector, 230 ohm
 2.5mm mono connector, 230 ohm
 3.5mm mono connector, 32 ohm
 1/4" mono connector, 32 ohm
 6.3mm mono connector, 8 ohm
 Mono Motorola

Product code

HTB79A
 HTB79F
 HTB79P3E
 HTB79A-02
 HTM79A
 HTM79B
 HTM79P3E
 HTM79A-03
 HTM79B-03
 HTM79P3E-03
 HTM79A-21
 HTM79A-23
 HTM79B-07
 HTM79P3E-34


Attachment

Headband
 Foldable Headband
 Helmet attachment
 Headband
 Headband
 Neckband
 Helmet attachment
 Headband
 Neckband
 Helmet attachment
 Headband
 Headband
 Neckband
 Helmet attachment

Weight (g)

290
 275
 320
 290
 290
 275
 320
 290
 275
 320
 290
 290
 275
 320

Colour



HTB79A, HTM79F, HTM79B, HTM79A

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.7	27.1	33.8	38.1	36.2	33.6	37.1
Standard Deviation (dB)	2.9	2.1	2.4	2.6	2.3	2.5	2.2
Assumed Protection (dB)	14.8	25	31.4	35.5	33.9	31.1	34.9

SNR=33dB H=33dB M=32dB L=24dB

HTB79P3E, HTM79P3E

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.2	26.4	33.9	37.2	35.4	33.2	37
Standard Deviation (dB)	3.1	2.5	2.7	2.3	2.6	2.4	2
Assumed Protection (dB)	14.1	23.9	31.2	34.9	32.8	30.8	35

SNR=32dB H=33dB M=31dB L=23dB





Peltor™ High Attenuation Headset ATEX



HTM79F-50

- EEx-approved listen-only headsets according to ATEX class EEx ib IIC T4
- High-attenuating shells with optimised acoustic design and excellent space for the ears for the best possible sound quality and comfort
- Soft, wide, foam and fluid filled ear cushions and individually sprung headband wires of stainless steel provide an even and consistent distribution of pressure around the ears for the best possible comfort
- Beam-mounted earphones that provide the least possible resonance and distortion for excellent sound reproduction even in very high-noise environments
- Numerous configurations:- overhead, neckband and helmet attached versions to meet most users' requirements.

Description

- 3.5mm mono connector, ATEX
- 3.5mm mono connector, ATEX
- 2.5mm mono connector, ATEX
- 3.5mm Stereo Screw-In connector, ATEX

Product code

- HTM79F-50
- HTM79P3E-50
- HTM79P3E-53
- HTM79P3E-54


Attachment

- Foldable Headband
- Helmet attachment
- Helmet attachment
- Helmet attachment

Weight (g)

- 310
- 320
- 320
- 320

Colour



HTM79F-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.7	27.1	33.8	38.1	36.2	33.6	37.1
Standard Deviation (dB)	2.9	2.1	2.4	2.6	2.3	2.5	2.2
Assumed Protection (dB)	14.8	25	31.4	35.5	33.9	31.1	34.9

SNR=33dB H=33dB M=32dB L=24dB

HTM79P3E-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.2	26.4	33.9	37.2	35.4	33.2	37
Standard Deviation (dB)	3.1	2.5	2.7	2.3	2.6	2.4	2
Assumed Protection (dB)	14.1	23.9	31.2	34.9	32.8	30.8	35

SNR=32dB H=33dB M=31dB L=23dB





Lightweight Solutions

Peltor™ Lightweight Solutions are designed for two-way radio users who must have clear reception of incoming transmissions while working in high noise areas. Compared to regular ear muffs, these products offer a neater and more discreet solution.



Peltor™ HearPlug™ Communication Earplugs




HTM06-01

- Listen-only earpiece with 3.5 or 2.5-mm mono plug
- Disposable and reusable communication earpieces included
- PELTIP1-01 and PELTIP2-01



PELTIP2-01

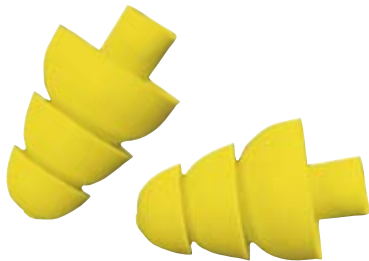

PELTIP1-01

PELTIP1-01

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	28	25.9	26.1	27.3	29	33.7	39.1
Standard Deviation (dB)	4.3	3.5	3.3	3.6	4.1	3.8	4.3
Assumed Protection (dB)	23.7	22.4	22.8	23.7	24.9	29.9	34.8

SNR=27dB H=27dB M=24dB L=23dB

PELTIP1-02

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	29.3	30.1	31.8	33.8	34.9	44.2	42.8
Standard Deviation (dB)	4.7	4.8	2.9	4.5	3.6	5.3	4.2
Assumed Protection (dB)	24.6	25.3	28.8	29.3	31.3	38.9	38.5

SNR=33dB H=33dB M=30dB L=28dB

Description

HearPlug™, 3.5 mm mono plug

HearPlug™, 2.5 mm mono plug

E-A-R™ Ultrafit™, reusable communication earplugs

E-A-R™ Classic™, disposable communication earplugs

Product code

HTM06-01

HTM07-01

PELTIP1-01

PELTIP2-01

Weight (g)

21

21

Colour





Peltor™ LW Headset



- Separating communication from hearing protection through the use of bone conduction speakers (balanced electromagnetic separation transducer or BEST)
- Combine with any 3M™ E-A-R™ Earplugs for hearing protection
- The headsets can be worn without earplugs when hearing protection is not required
- Adjustable noise compensated microphone for communication in noisy environments

Description

Direct lead headset

Product code

Headset with J11

Attachment

Neckband

Neckband

Weight (g)

50

50

Colour







Lite-Com™ Solutions

Peltor™ Lite-Com Solutions are a range of wireless products with a communication radio built into the shell. This system provides effective and effortless short-range two-way communication.



Peltor™ Lite-Com™ Basic Built-in Two-way Communication Headset



MT53H7A4400



- Communication on 8 channels in the PMR 446 MHz band
- 38 subchannels allow several user groups to communicate without listening to other groups on the same channel
- An electronic voice in the receiver tells you the settings of the device
- Unused, Lite-Com Basic switches off automatically to save the batteries

Description

PMR 446 MHz
PMR 446 MHz
PMR 446 MHz
Guide Receiver 446MHz
Guide Receiver 446MHz

Product code

MT53H7A4400
MT53H7P3E4400
MT53H7B4400
MT0H7A4400
MT0H7P3E4400

Attachment

Headband
Helmet attachment
Neckband
Headband
Helmet attachment

Weight (g)

418
438
403
418
438

Colour



MT53H7A4400

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12	20.6	29.6	35.1	30.4	32.4	36.7

SNR=31dB H=32dB M=29dB L=20dB

MT53H7P3E4400

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	14	22.4	28.1	33.8	33.4	35.4	38.7
Standard Deviation (dB)	1.5	2.7	1.7	2.3	2.6	2.3	1.8
Assumed Protection (dB)	12.5	19.7	26.4	31.5	30.8	33.1	36.9

SNR=30dB H=33dB M=28dB L=20dB



Peltor™ Lite-Com™ III Built-in Two-way Communication Headset



MT53H7A440B



- Available in two versions; with 8 channels in the PMR 446 MHz band or with 69 channels on the LPD 433 MHz band (A users license may be required)
- On the PMR channels 38 subchannels allow several user groups to communicate without listening to other groups on the same channel
- Built-in active-sound function lets you hear ambient sounds; warning signals, machine sounds, conversation etc
Sudden impulse noises at harmful levels are immediately attenuated
- An electronic voice in the receiver tells you the settings of the device
- LCD display to visualize advanced and standard settings
- Separate PTT button for the auxiliary input, where a cellular phone, a com. radio, or other audio source can be connected
- Unused, Lite-Com III switches off automatically to save the batteries

Accessories see also page 69

Description

Rechargeable battery
External PTT

Product code

ACK03
FL5602

Description

PMR 446 MHz
PMR 446 MHz
PMR 446 MHz
Dyn. Mic PMR 446 MHz
Dyn. Mic PMR 446 MHz

Product code

MT53H7A440B
MT53H7P3E440B
MT53H7B440B
MT7H7A440B
MT7H7P3E440B

Attachment

Headband
Helmet attachment
Neckband
Headband
Helmet attachment

Weight (g)

436
456
421
436
456

Colour



MT53H7A430B

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	16.5	20.7	31.4	33.7	34.5	38.4	37.2
Standard Deviation (dB)	2.4	2.3	1.8	3.3	2.2	3.1	4.7
Assumed Protection (dB)	14.1	18.4	29.6	30.4	32.3	35.3	32.5

SNR=31dB H=33dB M=28dB L=21dB

MT53H7P3E430B

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.8	21	30.9	32.6	31.5	38.9	38.2
Standard Deviation (dB)	2	1.8	3.6	3.3	2.7	3.7	3.9
Assumed Protection (dB)	15.8	19.2	27.3	29.3	28.8	35.2	34.3

SNR=30dB H=31dB M=28dB L=22dB



Peltor™ Lite-Com™ Pro

Programmable Built-in Two-way Communication Headset



MT53H7F470-50



- Programmable for communication on max. 30 channels in the 430-470 MHz band (A users license may be required)
- Approved for use in environments with a danger of explosion ATEX approved (Ex) II 1 G EEx ia IIC T4)
- Built-in active-sound function lets you hear ambient sounds; warning signals, machine sounds, conversation etc. Sudden impulse noises at harmful levels are immediately attenuated
- An electronic voice in the receiver tells you the settings of the device
- A cellular phone, a com. radio, or other audio source can be connected to the auxiliary input
- Unused, Lite-Com Pro switches off automatically to save the batteries

Accessories see page 69

Description

Rechargeable battery
External PTT

Product code

ACK05
FL5602-50

Description

Programmable 430-470 MHz
Programmable 430-470 MHz
Programmable 430-470 MHz
Programmable 430-470 MHz
Programmable 430-470 MHz
Programmable 430-470 MHz

Product code

MT7H7F470-50
MT7H7P3E470-50
MT7H7B470-50
MT53H7F470-50
MT53H7P3E470-50
MT53H7B470-50


Attachment

Headband
Helmet attachment
Neckband
Headband
Helmet attachment
Neckband

Weight (g)

418
438
403
418
438
403

Colour



MT7H7F470-50, MT53H7F470-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	14.7	23.4	30.7	34.6	34.5	36.9	37,3
Standard Deviation (dB)	3.9	4.6	3.2	3.4	3.1	2.7	4.2
Assumed Protection (dB)	10.8	18.8	27.4	31.2	31.4	34.2	33.1

SNR=30dB H=33dB M=27dB L=19dB

MT7H7P3E470-50, MT53H7P3E470-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	15.5	23.3	31.2	35.6	35.0	36.5	40.9
Standard Deviation (dB)	2.6	2.3	2.0	3.2	3.4	3.4	3.3
Assumed Protection (dB)	13.0	21.0	29.2	32.4	31.6	33.2	37.6

SNR=31dB H=33dB M=29dB L=21dB

MT7H7B470-50, MT53H7B470-50

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	16.2	22.9	31.7	35.6	34.5	37.7	40.0
Standard Deviation (dB)	3.2	2.2	2.0	2.9	3.0	3.9	3.3
Assumed Protection (dB)	13.0	20.7	29.7	32.7	31.5	33.8	36.8

SNR=31dB H=33dB M=29dB L=21dB



Tactical Solutions

The Peltor™ Tactical Solutions are invaluable tools for people who are subjected to impulse noises. Peltor™ Tactical Products protect against harmful noise while letting in and even amplifying ambient sounds.



Peltor™ SportTac™ Electronic Level Dependent Hearing Protector



MT16H210F-478-GN

- Developed specifically for hunters and marksmen
- Smooth level dependent function, which eliminates abrupt sound cut-off
- Interchangeable shells make it easy to change colour
- Equipped with automatic shut-off function
- Collapsible for easy storage

Description

Hunting, green and orange shells inc.
Sport shooting, black and red shells inc.

Product code

MT16H210F-478-GN
MT16H210F-478-RD

Attachment

Foldable headband
Foldable headband

Weight (g)

318
318

Colour



MT16H210F-478-GN

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	21.1	17.9	27	26.8	30.5	38.3	36.4
Standard Deviation (dB)	4.3	3.1	3.8	3	3	3.7	5.4
Assumed Protection (dB)	7.8	14.8	23.2	23.8	27.5	34.6	31

SNR=26dB H=29dB M=23dB L=16dB

Description

Shells	210100-478-GN
Shells	210100-478-OR
Shells	210100-478-RD
Shells	210100-478-SV
Shells	210100-478-VI
Shells	210100-CF

Product code

Colour



Article number

TAMT06 with straight contact, 3.5 mm, 2.5 mm.
TAMT06V with angled contact.



Article number

FL6H 3.5 mm mono jack
FL6M 2.5 mm mono jack
FL6N 3.5 mm stereo jack
FL6H-31 3.5 mm mono jack for 31 MHz radio


















Peltor™ Pro-Tac™ II Electronic Level Dependent Hearing Protector



- Improves communication and safety
- Level dependent function in stereo that lets you hear ambient sound: conversation, machine sounds and warning signals
- Plenty of space for the ear
- Last setting is stored when switched off
- Headset option with guide-mounted microphone
- Three colour options: Military green, Red, Black
- Automatic shut-off after two hours if no function is used
- Battery life is about 1000 hours. Warning signal when power is low, before shut-off
- Audio input jack for external radio
- Available as Bluetooth™ headset (A2DP profile). Not compatible with WS adapters

MT15H7A2 GN

Description	Product code	Attachment	Weight (g)	Colour
Standard	MT15H7A2 GN	Headband	370	 
Standard	MT15H7A2 RD	Headband	370	 
Standard	MT15H7A2 SV	Headband	370	 
Standard	MT15H7P3E2 SV	Helmet attachment	405	 
Standard	MT15H7B2 SV	Neckband	355	 
WS Headset (Bluetooth™)	MT15H7A2WS4	Headband	370	  

MT15H7A2 ** **

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	19.7	25.4	31	34.6	32.2	38.7	42.1
Standard Deviation (dB)	3.4	2.5	3.4	1.8	3.6	3.8	3.6
Assumed Protection (dB)	16.3	22.9	27.6	32.8	28.6	34.9	38.5

SNR=32dB H=31dB M=29dB L=24dB

MT15H7P3*2 ** **

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	20.7	24.7	31	35.1	32.6	40.4	42.1
Standard Deviation (dB)	5.4	3.9	3.4	2.9	3.1	3.1	2.7
Assumed Protection (dB)	15.3	20.8	27.6	32.2	29.5	37.3	39.4

SNR=31dB H=32dB M=29dB L=23dB

MT15H7B2 ** **

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	19.7	25.4	31	34.6	32.2	38.7	42.1
Standard Deviation (dB)	3.4	2.5	3.4	1.8	3.6	3.8	3.6
Assumed Protection (dB)	16.3	22.9	27.6	32.8	28.6	34.9	38.5

SNR=32dB H=31dB M=29dB L=24dB



Peltor™ ComTac™

Electronic Level Dependent Hearing Protector



MT15H68FB-02

- Level dependent function in stereo
- Last setting is stored when switched off
- Fully independent dual earphone system for active volume and external radio signal, for maximum security
- An external radio signal has priority and will function even when the ComTac is switched off or out of power
- Automatically switches off after two hours if no function is used. Two signals are emitted as a warning that the ComTac will switch off in one minute if no function is activated
- Battery life is about 250 hours. Three warning signals are emitted every 30 seconds for five minutes when power is low, then the headset switches off
- Audio input jack to allow connection to an external radio
- Available as headset

Description

Standard
Headset J11
Standard
Headset J11

Product code

MT15H68FB-02
MT15H68FB-38
MT15H68FB-08 SV
MT15H68FB-38 SV

Attachment

Foldable headband
Foldable headband
Foldable headband
Foldable headband

Weight (g)

315
315
315
315

Colour



MT15H68FB-*** **

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.9	18	23.5	30.8	33.9	43.3	41.1
Standard Deviation (dB)	3.9	3	2.2	2.1	3.2	3.9	5.6
Assumed Protection (dB)	10	15	21.3	28.7	30.7	39.4	35.4

SNR=27dB H=33dB M=24dB L=17dB



Peltor™ ComTac™ XS Electronic Level Dependent Hearing Protector



- Slim cup design
- Level dependent function in stereo
- Last setting is stored when switched off
- Fully independent dual earphone system for active volume and external radio signal, for maximum security
- Automatically switches off after two hours if no function is used. Two signals are emitted as a warning that the ComTac will switch off in one minute if no function is activated
- Battery life is about 250 hours. Three warning signals are emitted every 30 seconds for five minutes when power is low, then the headset switches off
- Audio input jack to allow connection to an external radio
- Available as headset

MT15H69FB-02 378

Description

Standard
Headset J11
Standard
Headset J11

Product code

MT15H69FB-02 378
MT15H69FB-38 378
MT15H69FB-08 378SV
MT15H69FB-38 378SV

Attachment

Foldable headband
Foldable headband
Foldable headband
Foldable headband

Weight (g)

295
315
295
315

Colour



MT15H69FB-** ***

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	14.4	17.4	24.1	31.1	31.5	38.1	37.3
Standard Deviation (dB)	4.8	3.4	3	2.2	3	2.8	3.2
Assumed Protection (dB)	9.6	14	21.1	28.9	28.5	35.3	34.1

SNR=26dB H=31dB M=24dB L=16dB



Peltor™ ComTac™ XP

Electronic Level Dependent Hearing Protector



- Slim cup design
- SNR of 28
- Level dependent function (talk through)
- Functions: external input mode, release time, balance, plug mode, equalizer mode and external mute mode
- Last setting is stored when switched off (except plug mode)
- Fully independent dual earphone system for talk through and external radio signal
- Compatible with the majority of ballistic helmets on the market
- Automatically switches off after two hours if no function is used
- Battery life is about 500 hours
- Available with bone conduction microphone for Marconi PRR Communication radio

MT17H682FB-69

Description

Standard
Headset J11
Standard
Headset J11
Headset J11
Gentex Flexi-Boom mic.
Bone conduction mic.
Headset Marconi PRR

Product code

MT17H682FB-02
MT17H682FB-38
MT17H682FB-08 SV
MT17H682FB-38 SV
MT17H682FB-68
MT17H682FB-69


Attachment

Foldable Headband
Foldable Headband
Foldable Headband
Foldable Headband
Foldable Headband
Foldable Headband

Weight (g)

285
335
285
335
335
335

Colour



MT17H682FB-** ***

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	11.5	17.9	27.8	30.0	32.1	36.2	40.3
Standard Deviation (dB)	2.5	2.7	1.8	2.3	3.0	2.0	3.1
Assumed Protection (dB)	9.0	15.3	25.9	27.7	29.1	34.2	37.2

SNR=28dB H=31dB M=25dB L=16dB



Peltor™ Tactical™ XP Headset Electronic Level Dependent Hearing Protector



MT1H7F2

- Level dependent function that lets you hear ambient sound: conversation, machine sounds and warning signals
- Electronic voice guided menu system
- Equipped with the following functions: volume for the level dependent function, balance, adjustable release time, equalizer, volume for external input and external input mode
- Plenty of space for the ear
- Last setting is stored when switched off
- Automatic shut-off after two hours if no function is used
- Warning signal when power is low, before shut-off
- Audio input jack for external radio
- Available as headset
- Also available as Flex headset with a standard chassis jack for connecting Flex cords (FL6U-**) for various types of communication equipment – com. radio, mobile or DECT

Description

Standard
Standard
Standard
Headset J11
Headset J11
Headset J11
Flex headset
Flex headset
Flex headset
Flex headset, LEMO
Flex headset, LEMO

Product code

MT1H7F2
MT1H7P3E2
MT1H7B2
MT1H7F2-07
MT1H7P3E2-07
MT1H7B2-07
MT1H7F2-77
MT1H7P3E2-77
MT1H7B2-77
MT1H7F2-47
MT1H7P3E2-47


Attachment

Foldable headband
Helmet attachment
Neckband
Foldable headband
Helmet attachment
Nec band
Foldable headband
Helmet attachment
Neckband
Foldable headband
Helmet attachment

Weight (g)

400
435
385
400
435
395
400
385
395
400
435

Colour



MT1H7F2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	138	21.5	30.9	36.6	35.9	35.5	39
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12.0	20.6	29.6	35.1	30.4	34.4	36.7

SNR=31dB H=32dB M=25dB L=20 dB

MT1H7B2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39.0
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12.0	20.6	29.6	35.1	30.4	34.4	36.7

SNR=31dB H=32dB M=29dB L=20dB

MT1H7P3*2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	14.0	22.4	28.1	33.8	33.4	35.4	38.7
Standard Deviation (dB)	1.5	2.7	1.7	2.3	2.6	2.3	1.8
Assumed Protection (dB)	12.5	19.7	26.4	31.5	30.8	33.1	36.9

SNR=30 H=33 M=28 L=20



Peltor™ Tactical™ XP Headset






















EX 'Intrinsically Safe' (ATEX) Headset



MT1H7F2-07-50

- Ex-approved headset in accordance to ATEX, class EEx ib IIC T4
- Ex-approved batteries included
- Fail safe functions which enable communication if batteries run out
- Level dependent function that lets you hear ambient sound: conversation, machine sounds and warning signals etc.
- Electronic voice guided menu system
- Equipped with the following functions: volume for the level dependent function, balance, adjustable release time, equalizer, volume for external input and external input mode
- Plenty of space for the ear
- Last setting is stored when switched off
- Automatic shut-off after two hours if no function is used
- Warning signal when power is low, before shut-off
- Audio input jack for external radio
- Battery life time approximately 1000 hours
- Available as headset

ATEX Adapters see page 66

Description	Product code	Attachment	Weight (g)	Colour
ATEX, Standard	MT1H7F2-50	Head band	390	  
ATEX, Standard	MT1H7P3E2-50	Helmet attachment	425	  
ATEX, Standard	MT1H7B2-50	Neck band	375	  
ATEX, Headset J11	MT1H7F2-07-50	Head band	400	   
ATEX, Headset J11	MT1H7P3E2-07-50	Helmet attachment	435	   
ATEX, Headset J11	MT1H7B2-07-50	Neck band	385	   

MT1H7F2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12.0	20.6	29.6	35.1	30.4	34.4	36.7

SNR=31dB H=32dB M=25dB L=20dB

MT1H7B2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39.0
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12.0	20.6	29.6	35.1	30.4	34.4	36.7

SNR=31dB H=32dB M=29dB L=20dB

MT1H7P3*2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	14.0	22.4	28.1	33.8	33.4	35.4	38.7
Standard Deviation (dB)	1.5	2.7	1.7	2.3	2.6	2.3	1.8
Assumed Protection (dB)	12.5	19.7	26.4	31.5	30.8	33.1	36.9

SNR=30dB H=33dB M=28dB L=20dB



Peltor™ WS Tactical™ XP Electronic Level Dependent Bluetooth™ Headset



MT1H7F2WS3

- Wireless connection via Bluetooth™ to communication radio, DECT or mobilephone
- Level dependent function that lets you hear ambient sound: conversation, machine sounds and warning signals
- Electronic voice guided menu system
- Equipped with the following functions: volume for the level dependent function, balance, adjustable release time, equalizer, volume for external input
- Plenty of space for the ear
- Last setting is stored when switched off
- Automatic shut-off after two hours if no function is used
- Warning signal when power is low, before shut-off

Description

WS headset, Bluetooth™
WS headset, Bluetooth™
WS headset, Bluetooth™

Product code

MT1H7F2WS3
MT1H7P3E2WS3
MT1H7B2WS3


Attachment

Foldable headband
Helmet attachment
Neckband

Weight (g)

400
435
385

Colour



MT1H7F2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12.0	20.6	29.6	35.1	30.4	34.4	36.7

SNR=31dB H=32dB M=25dB L=20dB

MT1H7B2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39.0
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12.0	20.6	29.6	35.1	30.4	34.4	36.7

SNR=31dB H=32dB M=29dB L=20dB

MT1H7P3*2

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	14.0	22.4	28.1	33.8	33.4	35.4	38.7
Standard Deviation (dB)	1.5	2.7	1.7	2.3	2.6	2.3	1.8
Assumed Protection (dB)	12.5	19.7	26.4	31.5	30.8	33.1	36.9

SNR=30dB H=33dB M=28dB L=20dB



Peltor™ Tactical™ XP

Electronic Level Dependent Ground Mechanic Headset



MT1H7F2-07-01 GB

- Fail safe functions which enable communication if batteries run out
- Level dependent function that lets you hear ambient sound, conversation, machine sounds and warning signals etc.
- Electronic voice guided menu system
- Equipped with the following functions: volume for the level dependent function, balance, adjustable release time, equalizer, volume for external input and external input mode
- Plenty of space for the ear
- Last setting is stored when switched off
- Automatic shut-off after two hours if no function is used
- Warning signal when power is low, before shut-off
- Battery life time approximately 1000 hours

Description

Headset GM

Product code

MT1H7F2-07-01 GB

Attachment

Foldable Head band

Weight (g)

400

Colour



MT1H7F2-07-01 GB

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	13.8	21.5	30.9	36.6	35.9	35.5	39
Standard Deviation (dB)	1.8	0.9	1.3	1.5	5.5	3.1	2.3
Assumed Protection (dB)	12.0	20.6	29.6	35.1	30.4	34.4	36.7

SNR=31dB H=32dB M=25dB L=20dB



Workstyle Solutions

With one of the products from the Peltor™ Workstyle Solutions range, you can both protect your hearing effectively and at the same time enjoy listening to the radio while working. Some models can even be connected to a telephone or communication radio, making you accessible wherever you are.



Peltor™ FM-Radio Hearing Protector



HRX520A 550-VT-ST



- FM-radio with superior audio performance and super fast digital tuning
- Easy to read LCD display for precise tuning
- Memory able to pre set up to 5 stations, so finding your favourite station is as easy as the push of a button
- Bass boost function
- A 3.5 mm stereo input jack makes it great for use with MP3 players
- Includes cord

Description

FM-radio, 3.5mm jack
FM-radio, 3.5mm jack

Product code

HRX520A 533-ST-ST
HRX520A 550-VT-ST

Attachment

Headband
Headband

Weight (g)

340
340

Colour



HRX530A 533-ST-ST, HRX530A 533-VT-ST

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	12.0	18.0	29.5	36.0	37.0	44.5	43.5
Standard Deviation (dB)	3.1	2.9	2.2	2.4	2.9	2.7	3.2
Assumed Protection (dB)	8.9	15.1	27.3	33.6	34.1	41.8	40.3

SNR=29dB H=36dB M=26dB L=16dB



Peltor™ Radio Hearing Protector



- Protect your hearing and listen to the radio – at the same time
- Designed for people who work outdoors – forestry, landscaping, mowing lawns, hobbies, etc. – to protect their hearing and let them listen to the radio at the same time
- Extra wide, soft, padded head band distributes weight while two-point suspension exerts low pressure for comfortable, long-term use
- Soft, liquid and foam filled ear cushions provide added comfort
- Battery lifetime approx. 200 hours
- Audio input for MP3 player. (Not all models)

HRXS7A-01

Description

Standard, audio jack
Standard, audio jack

Product code

HTRXS7A3-01
HTRXS7P3E3-01

Attachment

Headband
Helmet attachment

Weight (g)

340
340

Colour



HRXS7A-01

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.6	26.2	34.9	37.7	33.3	35.7	36.8
Standard Deviation (dB)	2.9	1.8	2.5	2.6	3.4	2.1	3.3
Assumed Protection (dB)	14.7	24.4	32.3	35.0	29.9	33.6	33.5

SNR=32dB H=32dB M=31dB L=23dB

HRXS7P3E-01

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	15.2	21.9	27.2	38.0	31.0	33.3	37.9
Standard Deviation (dB)	3.9	3.7	2.5	3.6	3.7	3.0	2.6
Assumed Protection (dB)	11.3	18.2	24.7	34.4	27.3	30.3	35.3

SNR=29dB H=30dB M=27dB L=19dB



Peltor™ Alert Hearing Protector

Electronic Level Dependent FM/AM-Radio



M2RX7A



- The level dependent hearing protector radio provides comfortable, effective protection from harmful noise. At the same time, it provides added safety because its level dependent function attenuates loud noises while amplifying weak ones. The radio receiver provides extra working pleasure and the sound is reproduced in stereo with a bass that does the music justice
- The level dependent function 'listens' to your surroundings and adapts to what it 'hears'. Each ear shell has a microphone that captures all sounds. The electronics inside analyse the information and process the sound before reproducing it to the ear
- Easy-to-handle volume control knobs for radio and level dependent function
- A short, flexible antenna provides excellent reception with no annoying interference, even in harsh conditions
- Switches automatically from stereo to mono for the best reception in the event of a weak signal
- FM/AM switch to choose your radio reception
- Also available as Flex headset with a standard chassis jack for connecting Flex cords (FL6U-**) for various types of communication equipment – communication radio, mobile or DECT


Description

Description	Product code
Standard	M2RX7A
Standard	M2RX7P3E
Headset, J11	M2RX7A-07
Headset J11	M2RX7P3E-07
Flex headset	M2RX7A-77
Flex headset	M2RX7P3E-77
Flex headset, LEMO	M2RX7A-47
Flex headset, LEMO	M2RX7P3E-47

Attachment

Attachment	Weight (g)
Headband	400
Helmet attachment	430
Headband	400
Helmet attachment	430
Headband	400
Helmet attachment	430
Headband	400
Helmet attachment	430

Colour



M2RX7A

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	19.7	25.4	31	34.6	32.2	38.7	42.1
Standard Deviation (dB)	3.4	2.5	3.4	1.8	3.6	3.8	3.6
Assumed Protection (dB)	16.3	22.9	27.6	32.8	28.6	34.9	38.5

SNR=32dB H=31dB M=29dB L=24dB

M2RX7P3E

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	20.7	24.7	31	35.1	32.6	40.4	42.1
Standard Deviation (dB)	5.4	3.9	3.4	2.9	3.1	3.1	2.7
Assumed Protection (dB)	15.3	20.8	27.6	32.2	29.5	37.3	39.4

SNR=31dB H=32dB M=29dB L=23dB



Peltor™ WS Alert Bluetooth™ Headset

Electronic Level Dependent FM/AM-Radio



Now with Stereo Streaming Bluetooth™ (A2DP)



- Wireless connection via Bluetooth™ to DECT or mobile phone
- Stream music / internet radio from MP3 player, mobile phone, computer etc
- FM/AM radio receiver
- The level dependent function 'listens' to your surroundings and adapts to what it 'hears'. Each ear shell has a microphone that captures all sounds. The electronics inside analyse the information and process the sound before reproducing it to the ear
- Easy-to-handle control knobs
- A short, flexible antenna provides excellent reception with no annoying interference, even in harsh conditions
- Switches automatically from stereo to mono for the best reception in the event of a weak signal
- FM/AM switch to choose your radio reception
- Not compatible with Peltor™ WS-adapter

M2RX7AWS4

Description

WS headset, Bluetooth™

WS headset, Bluetooth™

Product code

M2RX7AWS4

M2RX7P3EWS4

Attachment

Headband

Helmet attachment

Weight (g)

400

430

Colour



M2RX7A

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	19.7	25.4	31	34.6	32.2	38.7	42.1
Standard Deviation (dB)	3.4	2.5	3.4	1.8	3.6	3.8	3.6
Assumed Protection (dB)	16.3	22.9	27.6	32.8	28.6	34.9	38.5

SNR=32dB H=31dB M=29dB L=24dB

M2RX7P3E

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	20.7	24.7	31	35.1	32.6	40.4	42.1
Standard Deviation (dB)	5.4	3.9	3.4	2.9	3.1	3.1	2.7
Assumed Protection (dB)	15.3	20.8	27.6	32.2	29.5	37.3	39.4

SNR=31dB H=32dB M=29dB L=23dB





Motorsport Solutions

For over two decades, the world's leading rally sport teams battling for world championship have put their faith in the Peltor™ Intercom System – and in most cases our helmets and headsets as well.



Peltor™ Rally Intercom

FMT120



FMT120

- The classic intercom amplifier for clear and reliable communication
- The Peltor™ Rally Intercom FMT120 provides a full-duplex connection with extremely high sound quality thanks to a specially designed frequency filter
- The audio output enables sound recording of the communication between driver and co-driver
- An attenuation switch to change the driver's microphone sensitivity, which is set 10 dB lower than the co-driver's as standard
- Separate volume controls
- LED indicator for on/off and low battery
- EXT connection for mobile phone or communication radio. (See FLEX-cables page 65)
- Connection for PTT
- Possible to switch between dynamic and electret microphone

Product code

FMT120

Description

Rally Intercom

Peltor™ Rally Intercom

FMT200



FMT200

- Peltor™ Rally Intercom for the best possible communication
- Designed to resist interference from other electric signals in the rally car
- The Peltor™ Rally Intercom FMT200 is easy to connect to other communication devices
- Easy to manoeuvre through touch controls; LEDs provide information about settings.

Product code

FMT200

Description

RALLY INTERCOM, AMPLIFIER



Peltor™ Motorcycle Intercom FMT160



- First-class stereo motorcycle intercom with excellent sound quality
- You can connect an external sound system – radio, CD or tape deck
- The amplifier runs on the 12V power from the motorcycle's electrical system
- The amplifier has adjustable voice control (VOX) and automatic muting of the radio when the driver and passenger talk
- Includes cables for connecting a GSM phone, GPS, MP3 player etc.

Product code

FMT160-01

FMT160-02

Description

For full face helmets, cables inc.

For open face helmets, cables inc.



Peltor™ Rally Headset



- Comfortable and high attenuating headset for clear and reliable communication
- Peltor™ practice headset
- Low weight, comfortable design
- Compatible with the FMT15, FMT110, FMT120, FMT200 amplifiers and the FL5000 adapter
- Fast-adjusting, noise-cancelling microphone
- Can be connected to most communication radio systems via an adapter

Description
Headset J11

Product code
MT7H79A 78-VI

Attachment
Head band

Weight (g)
315

Colour

MT7H79A

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	17.7	27.1	33.8	38.1	36.2	33.6	37.1
Standard Deviation (dB)	4.7	2.2	2	2	3.4	2.9	4.2
Assumed Protection (dB)	6.5	12.1	23.6	27	28.6	36.8	34.5

SNR=33dB H=33dB M=32dB L=24dB



Peltor™ Helmet Headset Kits

MT632, MT63



MT632

- Easy to adapt to most helmets
- Ambient noise-compensated, fast adjusting microphone for optimal positioning (3-5 mm from the lips)
- Compatible with most helmets on the market

Description	Product code
Open face helmet kit	MT632
Full face helmet kit	MT63



MT63



Peltor™ Racing Communication Plugs



- High quality in-ear speakers with noise attenuating plugs
- Small size for comfortable use with motorsport helmets
- CE-approved according to EN 352-2:2002 and EN 352-6:2002
- Plugs are replaceable for hygienic reasons
- Comes with two different types of earplugs - E-A-R™ Classic™ and E-A-R™ UltraFit™ earplugs
- RCA plug for quick blind mounting
- Connect to Peltor™ Intercom or straight to communication radio
- Can also be used with throat microphone and FL50** PTT

Description

Racing communication plugs full face helmet Kit
 Racing communication plugs open face helmet kit
 Racing communication plugs
 20 pairs of E-A-R™ Classic™ communication plugs
 20 pairs of E-A-R™ UltraFit™ communication plugs

Product code

MT63-FL6Y
 MT3N-FL6Y
 HTM042
 PELTIP21-01
 PELTIP11-01

Contains

in-ear speakers, microphone, y-cable, 2x4 plugs, clip
 in-ear speakers, microphone, y-cable, 2x4 plugs, clip
 in-ear speakers, 2x4 plugs, clip

Cables

ICOM™ IC-F110
 ICOM™ straight connector
 ICOM™ angled connector
 Motorola™ GP300
 Motorola™ GP340
 Motorola™ GM350
 Kenwood™ 6-pole
 Kenwood™ 8-pole
 Kenwood™ portable
 Mobile phones (extra adapter TAH**)

Product code

FL9MK-01
 FL9MB-01
 FL9MB-01V
 FL9MC-01
 FL9MD-01
 FL9MJ-01
 FL9MH-01
 FL9MI-01
 FL9MA-01
 FL6-08

PTT

PTT with large button
 PTT with small button

Product code

TK52
 TK57-01/1

3M acknowledges the respective Trademark Owner's rights in the above trademarks

E-A-R™ Classic™ Plug PELTIP21-01

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	28.4	30.3	32.1	33.5	35.6	44.1	44.3
Standard Deviation (dB)	5.4	5.8	6.4	5.8	4.1	4.6	4.9
Assumed Protection (dB)	23.0	24.4	25.7	27.7	31.5	39.5	39.4

SNR=32dB H=33dB M=28dB L=26dB

E-A-R™ UltraFit™ Plug PELTIP11-01

Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	26.6	28.8	28.8	29.1	31.9	31.8	38.3
Standard Deviation (dB)	7.3	7.6	8.4	7.7	7.1	9.3	6.1
Assumed Protection (dB)	19.3	21.2	20.4	21.4	24.8	22.6	32.2

SNR=25dB H=24dB M=22dB L=21dB



Peltor™ G7 RC Helmet

G7*-02 RC, G7*-02-D RC



G7*-02-D RC

- Maximum safety and minimum weight helmets with built in hearing protectors
- Peltor™ G7 RC - For powerboat, snowmobile and rescue
- Approved in accordance with BSI, open face helmet available with or without Communication Set.

Description

Boating, rescue etc.
without Communication Set

Product code

G7*-02 RC

Weight (g)

1200

Colour



Boating, rescue etc.
with Communication Set

G7*-02-D RC

1500





Peltor™ Performance G78 Helmet



G78*-D-H GR

- Peltor™ Performance G78 – Professional Rally Helmet
- Ultra-light BSI approved rally helmet
- Manufactured from Tricomp, a composite of fibreglass, polyamide and carbon fibre
- Nomex flame resistant interior lining
- Available with HANS post anchors and communication set



G78* VI

Description	Product code	Weight (g)	Colour
with HANS anchors	G78*-H GR	1100 +/- 50g	
with HANS anchors and communication set	G78*-D-H GR	1285 +/- 50g	
w/o communication set	G78* VI	1040 +/- 50g	
with HANS anchors	G78*-H VI	1100 +/- 50g	
with HANS anchors and communication set	G78*-D-H VI	1285 +/- 50g	
with communication set	G78*-D VI	1265 +/- 50g	



Peltor™ G10 Helmet

G10*-02 VI, G10*-02-D VI



G10*-02 VI

- Maximum safety and minimum weight helmets with built in hearing protectors
- Peltor™ G10 Helmets - For Karting or Formula. Fullface SIS approved lightweight helmet, with or without communications set

Description	Product code	Weight (g)	Colour
without communication set	G10*-02 VI	1100	<input type="text"/>
with communication set	G10*-02-D VI	1150	<input type="text"/>





Intercom Systems

Peltor™ Intercom Systems are designed to minimise interfering noise and maximise audibility and communication in noisy environments. These systems enable users to communicate in duplex.



Peltor™ Dect-Com™ Base Unit

DCS8, DCS4



DCS4
Case not included

DCS8B
DCS4B

- Full duplex, short range wireless intercom system for effortless and reliable communication with 4 or 8 portable units in conference
- High secrecy by digital transmission
- Power supply 230 V AC or 9-28 V DC with back-up battery for temporary power failure
- Line in / line out connection for external equipment; com. radio, alarm, telephone line etc.

Description	Product code	Colour
For 8 users EU	DCS8	Black
For 4 users EU	DCS4	Black
For 8 users UK	DCS81	Black
For 4 users UK	DCS41	Black

Peltor™ Dect-Com™ Repeaters

DCS2, DCS24

Description	Product code	Colour
Repeater for 2 users (ext. Antenna)	DCS2	White
Repeater for 4 users	DCS24	White

Peltor™ Dect-Com™ Portable Unit

DCS1, DCS11



DCS1

DCS1P

- Working range about 300 metres from the base unit (in line of sight), extension possible to about 600 metres with repeaters
- Peltor™ J11 connector works with all Peltor™ standard headsets
- Voice activated transmission, VOX, for blocking unwanted ambient sounds, or fully open microphone
- Conversation time up to about 15 hours
- Belt clip
- Available with PTT button for control of external equipment connected to the base unit

Description	Product code	Colour
DECT-com hand set EU	DCS1	Black
DECT-com hand set UK	DCS11	Black
DECT-com hand set EU with PTT	DCS1P	Black

Peltor™ Vehicle Intercom

T8034A



T8034A

- The Peltor™ Vehicle Intercom is an intercom system based on Peltor™ rally amplifiers
- The system is designed for use in vehicles on land and sea, combining full-duplex communication with connectivity to a mobile station/com radio(s)
- The vehicle intercom system is fitted in a moisture and impact-resistant metal capsule
- Cables for power, headsets, PTT function and mobile stations can be connected to the unit

Description	Product code	Colour
Max. 8 users, power supply 12V	T8034A	Grey



Adapters & Cables

Sturdy, water-resistant adapters with integrated push-button (PTT) for connecting Peltor™ headsets to communication radios and mobile telephones.
For environments with risk of explosion, we also have ATEX-approved EX adapters.

3M™ Adapter Cables

Flex Cables

Product code	Communication radio
FL6U-31	Alan 441
FL6U-31	Albecom 1221/1331/PD1000
FL6U-35	Albrecht Tectalk Contact 446 PMR
FL6U-31	Cobra
FL6U-21	HandiePro, Radius P110
FL6U-31	Hunter MK16, MK24
TAA13-T0299	ICOM F31/F41
FL6U-35	ICOM IC-F3GS, GT51/61 F4GS, GT etc with angled connector
FL6U-31	ICOM IC-F3S, F4S, IC-E90, LPD06,PMR06 (with straight connector)
TAA19-T0299	ICOM F34/F44
FL6U-36	Kenwood 260/270, 360/370 LPD, TH22E PMR etc
FL6U-31	Lafayette, DC31 Micro-3, DC155 Micro-3
FL6U-31	Maxon SL25
FL6U-21	Motorola GP300, CPO40
FL6U-32	Motorola GP320, 328, 340, 360, 380, 388, 640, 680, 1280
FL6U-61	Motorola Visar 3,5 mm, GP344/388 via Motorola adapter plug
AL3CB-T0299	Motorola GP900
TAA20-T0299	Motorola GP344/GP388, GP328+ /GP338 +
FL6U-62	Motorola TETRA MTH800/MTP850
TAA22-T0299	Vertex VX160/400
FL6U-31	TEKK
FL6U-31	Yaesu (older models)
FL6U-31	Zodiac PA2099/PA1599/PA5499/ PA5500/P2400 + various LPD/PMR radios
FL6U-58	Sepura SRP 2000 / SPM 3*000

Product code	DECT- and mobile phones
FL6U-28A	Ascom DECT 9d23/Offi ce 155 Pro -
FL6U-28	Ericsson 628/688/788/868/888/T10/T18/R5250s Pro and DT570
FL6U-28A	Ericsson DT400/DT410/DT420/DT590 -
FL6U-28	Ericsson GSM other models -
FL6U-28	Ericsson T20/T28/T29/T39/T65/T66/T68/ R310/R320/R380/R520/R600/T200/T300/T600
FL6U-28	Motorola GSM – most models have a jack on the side -
FL6U-28	Nokia 3210/3310/3330/3410/3510/3510i/3650/5210/5510/6510/7650/8210/8310/8850/8890/8910
FL6U-28	Nokia 5100/6100/6610/6650/6800/7210/7250
FL6U-48	Nokia 5110/5130/6110/6150/6210/6310/6310i/7110
FL6U-28	SonyEricsson K310i, K610i, K750i, W800i, W550i, W900i, P990 and more

Handsfree adapter
-
TAH10
-
-
TAH11
-
TAH02
TAH03
TAH01
TAH12



Standard Adapters

Product code	Communication radio
FL5001	Peltor™ "standard"
FL5005	Ericsson Freeset, Tateco CTS900 (2.5 mm plug)
FL5010	ICOM IC, Alan, Zodiac (straight connector), Yaesu, Alinco
FL5011	Dittel FSG 4, FSG 5
FL5017	Motorola Visar (GP344, GP388 with Motorola's adapter PMLN4455A)
FL5018	Motorola GP900, HT1000, MT2000
FL5019	Motorola Expo, Maxon Slim line
FL5030	Motorola GP340, GP320
FL5034	ICOM IC-F3GS, IC-F3GT, IC-F4GS, IC-F4GT (angled connector)
FL5035	Kenwood TK3101, Funkey
FL5042	Nokia TETRA THR880/ EADS TETRA THR880i
FL5044	ICOM F31/F41 F51/F61

Product code	Communication radio
FL5058	Sepura TETRA SRP2000 / SRH3*00
FL5061	Sailor SP3510, SP3520
FL5062	Motorola TETRA MTH800 / MTP850
FL5063	Motorola Mototrbo
FL50-T9088	ICOM IC-M1 / M71
FL50-T9121	ICOM IC-A5 /A23
FL50-T9139	ICOM IC-F34/F44
FL50-T9140	Vertex VX 160 / 400
FL50-T9143	Motorola GP344 / 388
FL50-T9148	Vertex VX 820, 920
FL50-T9150	Vertex HX370



3M™ Adapters & Cables



ATEX Approved Adapters

(Ex class ATEX - Ex II 2 G EEx ib IIC T4)

Product code	Communication radio
FL5205	Tateco CTS900, Ericsson Freeset
FL5212	Motorola MX1000, MX2000, MX3000
FL5214	Motorola GP300 / Radius P110
FL5216	Ericsson P50/500
FL5218	Motorola HT1000, MT2000, GP900, GP1200
FL5230	Motorola GP320/340
FL5242	EADS THR880 ex
FL5245	TP8000 Atlantis



WS Adapters

(Bluetooth™)

Product code	Communication radio
FL6007-WS	Ground Mechanic adapter
FL6010-WS	ICOM IC, Alan, Zodiac (straight connector)
FL6014-WS	Motorola GP300, CP040, Radius P110
FL6018-WS	Motorola HT1000, MT2000, GP900
FL6030-WS	Motorola GP320/340
FL6034-WS	ICOM IC-F3GS, IC-F3GT, IC-F4GS, IC-F4GT (angled connector)
FL6035-WS	Kenwood TK 3101 Funkey
FL6042-WS	Nokia TETRA THR880 / EADS TETRA THR880i
FL6044-WS	ICOM F31/F41 F51/F61
FL6048-WS	ICOM IC-M1, IC-M90
FL6058-WS	Sepura SRP2000 / SRH3*00



Ground Mechanic Adapters

(Hi-Visibility)

Product code	cable	connector
FL5006-GB	Hi-Viz 3,0 - 6,0 m LC	Original plug PJ051B
FL5006-02 GB	Hi-Viz 3,0 - 6,0 m LC	
FL5006-03 GB	Hi-Viz 3,5 - 10,0 m LC	
FL5007 GB	Hi-Viz 1,5 - 6,5 m LAL	Original plug PJ051B
FL5007-02 GB	Hi-Viz 1,5 - 6,5 m LAV	
FL5007-04 GB	Hi-Viz 1,8-7,5 m LAV	
FL5008 GB	Hi-Viz 6,5 m LC	Original plug PJ051B
FL5008-02 GB	Hi-Viz 3,0 m LAU	



Peltor™ Lite-Com™ Cables

(Connection cords for external communication equipment)

Product code	Communication radio
FL6BR	For use with Peltor™ FL5000 Adapters, with J11 connector (Nexus TP-120)
FL6BS	Connector cord with 2-pole 2.5 mm connector. For listening.
FL6BT	Connector cord with 2-pole 3.5 mm connector. For listening.
FL6CS	Connector cord with 3-pole 2.5mm connector for use with DECT and mobile phones
FL6CT	Connector cord with a 3-pole 3.5mm stereo connector. For listening to MP3 etc



Accessories

Headsets

Peltor™ Non Attenuation
Peltor™ Medium Attenuation
Peltor™ High Attenuation Standard
Peltor™ High Attenuation Twin Cup
Peltor™ High Attenuation Direct Lead
Peltor™ High Attenuation WS Bluetooth™
Peltor™ High Attenuation ATEX
Peltor™ High Attenuation Aviation MT52 mic.
Peltor™ High Attenuation Aviation MT51 mic.
Peltor™ High Attenuation Ground Mechanics H79 cup
Peltor™ High Attenuation Ground Mechanics H540 cup

Listen Only

Peltor™ Non Attenuation
Peltor™ Medium Attenuation
Peltor™ High Attenuation
Peltor™ High Attenuation ATEX
Peltor™ Light Weight Solutions
Peltor™ Hearplug

LiteCom

Peltor™ LiteCom Basic™ Hearing Protection
Peltor™ LiteCom III™ Hearing Protection

Tactical

Peltor™ SportTac™ Hearing Protection
Peltor™ ProTac II™ Hearing Protection
Peltor™ ComTac™ Hearing Protection
Peltor™ ComTac XS™ Hearing Protection
Peltor™ Tactical XP™ Hearing Protection

WorkStyle

Peltor™ FM- Radio™ Hearing Protection
Peltor™ Alert™ Hearing Protection

Hygiene kit

HY02
HY63
HY79
HY13
HY79
HY79
HY79
HY79
HY79
HY79
HY79
HY13

Wind shield surround microphone

–
–
–
–
–
–
–
–
–
–
–

Wind protection speech microphone

M40/1, M42/1
M40/1, M42/1
M40/1, M42/1
M40/1, M42/1
M995
M995
M40/1, M42/1
M40/1, M42/1
M995
M40/1, M42/1
M995

HY02
HY63
HY79
HY79
–
–

–
–
–
–
–
–

–
–
–
–
–
–

HY79
HY79

M60/2

M995
M995

HY21
HY79
HY68 (sv)
HY68 (sv)
HY79

210100-** (complete shells)
M60/2
M60/2
M60/2
M41/2

M995
M40/1, M42/1
M40/1, M42/1
st headset M40/1, Flex M995

HY73
HY79

M60/2

st headset M40/1, Flex M995
st headset M40/1, Flex M995



3M™ Accessories



Accessories

Product code

FE0247

FP9006

FP9007

VT612

Description

Headset wall hanger

Headset case

Headset bag

Helmet bag



FP9007



FE0247



VT612



FP9006

Accessories

Product code

TK52
TK54
TK57-01/1
MT9
MT91-50
FL5602
FL5602-50

Description

PTT with J22
PTT with J22, 1,6 m cable
Finger PTT with J22, 1,0 m cable
Throat microphone, dynamic
Throat microphone, dynamic, ATEX
External PTT
External PTT



MT9



TK54



FL5602



TK57-01/1



MT91-50



FL5602-50

Accessories

Product code

ACK03
ACK05
FR03-GB
FR03-EU
FR03-12
FR05

Description

Rechargeable battery pack, 1700 mAh
Rechargeable battery pack, 2500 mAh (only for Lite-Com Pro)
Battery charger for ACK03, UK plug, 230V
Battery charger for ACK03, EU plug, 230V
Battery charger for ACK03, 12V
Battery charger for ACK05, 230V



ACK03



FR03-12



FR03-EU

Lite-Com Pro



FR05



ACK05



Joining Forces for Your Safety

More safety from one source


Since 2008, renowned Peltor™ and E-A-R™ products significantly broaden 3M's range of hearing, eye, face and head protection products. You will benefit from the combined forces of companies who have been setting standards worldwide in the occupational health field.

Protect yourself and your employees better than before with professional occupational health solutions that meet all your requirements, which are perfectly tailored to your individual applications.

A safe bet for even better performance

This new portfolio of 3M Company presents a huge advantage for you as customer and user because by joining forces we will be able to develop even better and more comfortable personal protective equipment solutions. This translates to enhanced protection, more comfort and increased productivity. Quality, innovation and know-how will continue to be the distinguishing features of every one of our products – for increased safety and ease of use.

To answer any questions you may have related to occupational health, the contacts you already know will continue to be available to you with the same good service you have become accustomed to.

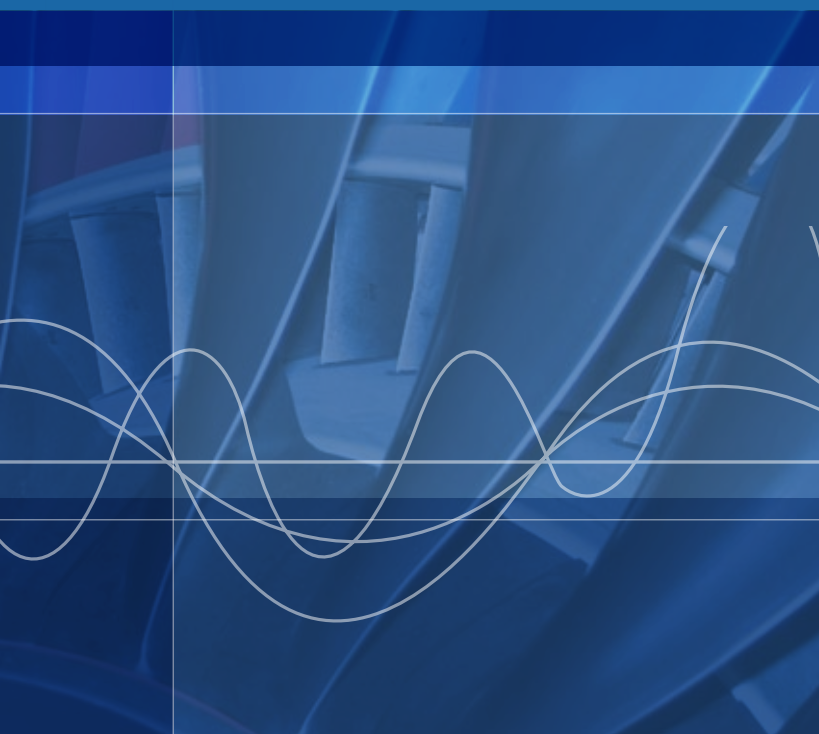

3M Health and Safety Helpline

0870 60 800 60 (UK), 1 800 320 500 (Ireland)

Diverse range of personal protective equipment*

The combined portfolio of 3M™, Peltor™ and E-A-R™ Personal Protective Equipment includes high-quality, innovative solutions to protect people at work. Here are some examples:

Respiratory protection



Hearing protection



Eye protection



Head protection



Welding protection



Protective coveralls



*Photos of product examples

For more information about our products and services visit our website at www.3M.com/uk/ohes



Occupational Health Group
3M United Kingdom plc
3M Centre
Cain Road, Bracknell
Berkshire RG12 8HT
Tel: 0870 60 800 60
www.3M.com/uk/ohes

3M Ireland Limited
The Iveagh Building
The Park
Carrickmines
Dublin 18
Tel: 1 800 320 500

Please recycle. Printed in the United Kingdom.
© 3M 2009. All rights reserved.
Bluetooth is a registered trademark of Bluetooth SIG Inc
CHCOMMSCAT Iss.1